

# S DISPENSERS SELF SERVICE K44



**EN.** Complete range of fuel dispensers for non commercial use. Sturdy structure fitted with front door for easy maintenance operations. High capacity vane pump. Inbuilt bypass.

Automatic nozzle with swivel connection. Inbuilt water absorption filter (or on request according to model) to ensure that dispensed product is free of impurities.

Rotating-disk displacement flow meter with mechanical readout system.

**RU.** Полный ассортимент распределителей топлива для индивидуального использования. Прочная конструкция, оснащенная передним окошком для упрощения техобслуживания. Крыльчатый насос повышенной производительности. Встроенный обвод.

Автоматический пистолет с поворотным соединением. Встроенный абсорбирующий водный фильтр (или по заказу, в зависимости от модели), гарантирующий подачу продукта без примесей.

Оснащены объемными счетчиками литров с колеблющимся диском и механической индикацией.

**DE.** Komplette Palette von Kraftstoff-Zapfsäulen für Privatgebrauch. Widerstandsfähige Struktur mit Fronttür zur leichteren Wartung. Flügelzellenpumpe mit hoher Förderleistung. Integriertes ByPass Ventil.

Automatische Zapfpistole mit Schlauchdrehgelenk. Eingebauter (oder je nach Modell auf Wunsch erhältlicher) Wasseraufnahmefilter, damit das Produkt ohne Verunreinigungen abgegeben wird.

Ausgestattet mit volumetrischem Taumelscheiben-Literzähler mit mechanischer Anzeige.


## PERFORMANCE

- Flow rate up to 90 l/min
- Accuracy: +/- 1 %
- Continuous AC operation.
- Noise level below 75 dB
- IP55 protection

- Расход до 90 л/мин
- Погрешность измерения: +/- 1 %
- Непрерывное функционирование от электросети
- Уровень шума ниже 75 дБ
- Защита IP55

- Durchflussmenge bis 90 l/Min.
- Abgabegenauigkeit: +/- 1 %
- Dauerbetrieb AC
- Kleinster Lärmpegel 75 dB
- Schutzklasse IP55

## DIMENSIONS

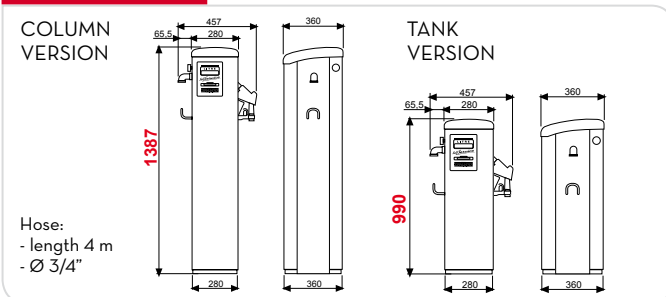

## PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
<b>Column versions</b>					
F0073701B	67	148	1478x488x400	58,2x19,2x16,5	1
F00740B0B	75	165	1478x488x400	58,2x19,2x16,5	1
F0074002A	75	165	1478x488x400	58,2x19,2x16,5	1
<b>Tank versions</b>					
F00737B0B	57	126	1080x488x400	42,5x19,2x16,5	1
F00740B0B	65	143	1080x488x400	42,5x19,2x16,5	1
F00737B2B	57	126	1080x488x400	42,5x19,2x16,5	1



Flow-rate

up to  
**90** l/min  
(up to 24 gpm)

Accuracy

+/-  
**1%**

**PIUSI**<sup>®</sup>

DISPENSERS



Column version



Tank version



PUMPS

METERS

NOZZLE METERS

NOZZLE

SPECIAL EQUIPMENTS

**FEATURES**

Mechanical meter integrated



Filter integrated (column version)



FLUID MONITORING

ACCESSORIES

FILTERING

**PRODUCTS' RANGE** TECHNICAL DATA

Code	Description	Fluids type	Flow-rate		Voltage			Pump mod.	Meter mod.	Nozzle type	Filter		Inlet BSP	PC connection
			l/min	gpm	AC V./Hz DC Volt	Power Watt	Amp. max.				H <sub>2</sub> O filter	Filtering capacity		
<b>Column versions</b>														
F0073701B	Self service 70 K44	DB	70	18	230/50	900	4,2	Panth 72	K44	Aut.	YES	30 μ	1"1/2	NO
F00740B0B	Self service 100 K44	DB	90	24	230/50	1150	5,7	E 120	K44	Aut.	YES	30 μ	1"1/2	NO
F0074002A	Self service 100 K44 Pulser	DB	90	24	230/50	1150	5,7	E 120	K44P	Aut.	YES	30 μ	1"1/2	NO
<b>Tank versions</b>														
F00737B0B	Self service 70 K44 Tank	DB	70	18	230/50	900	4,2	Panth 72	K44	Aut.	NO	-	1"1/2	NO
F00740B0B	Self service 100 K44 Tank	DB	90	24	230/50	1150	5,7	E 120	K44	Aut.	NO	-	1"1/2	NO
F00737B2B	Self service 70 K44 Tank Pulser	DB	70	18	230/50	900	4,2	Panth 72	K44P	Aut.	NO	-	1"1/2	NO

Upon request it is available with different voltages and 60 Hz frequency