

DISPENSERS

ST 200 DC



EN. High flow rate portable dispenser unit. ST 200 dispenses diesel fuel at a rate of up to 185 l/min and controls the flow with great precision (+/- 1%) thanks to the oval-gear flow meter (on request).

RU. Высокопроизводительный переносной узел подачи. ST 200 DC подает дизельное топливо со скоростью до 185 л/мин и контролирует поток с точностью (+/- 1%) благодаря счетчику литров с овальными шестернями (по заказу).

DE. Tragbares Abgabeaggregat mit hoher Förderleistung. Die Zapf- und Abgabegeschwindigkeit für Dieseltreibstoff des ST 200 DC beträgt 185 l/min. Der Treibstofffluss wird mittels Ovalraddurchlaufzähler mit höchster Präzision kontrolliert (+/- 1%) (auf Wunsch).


PERFORMANCE

- Flow rate up to 185 l/min
- Duty cycle 20 min ON / 40 min OFF
- Power supply 24 V DC

- Расход до 185 л/мин
- Рабочий цикл 20 мин ВКЛ / 40 мин ВЫКЛ
- Питание 24 В пост. тока

- Durchflussmenge bis 185 l/Min.
- Arbeitszyklus 20 Min. ON / 40 Min. OFF
- Stromversorgung 24 V DC

DIMENSIONS

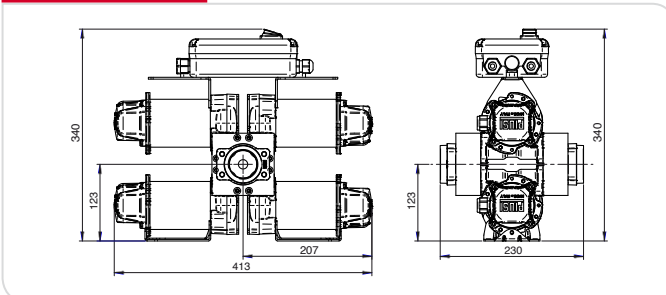

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
F00318000	18	40	480x370x265	18,9x14,6x10,4	1



Flow-rate

up to
185 l/min
(up to 48 gpm)



PIUSI[®]

DISPENSERS

PUMPS

METERS

NOZZLE METERS



NOZZLE

SPECIAL EQUIPMENTS

FLUID MONITORING

ACCESSORIES

FILTERING

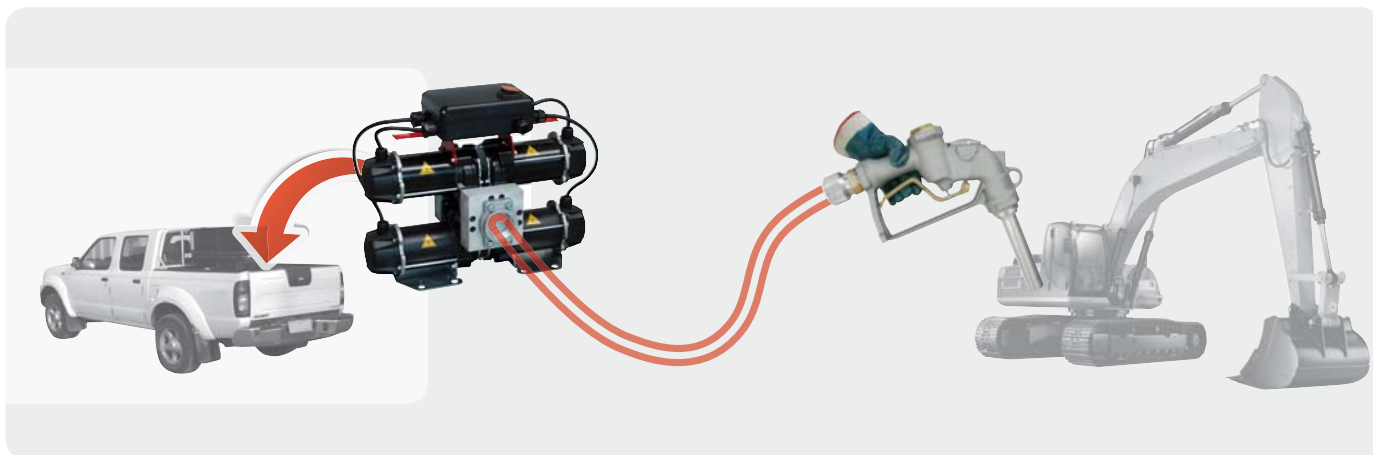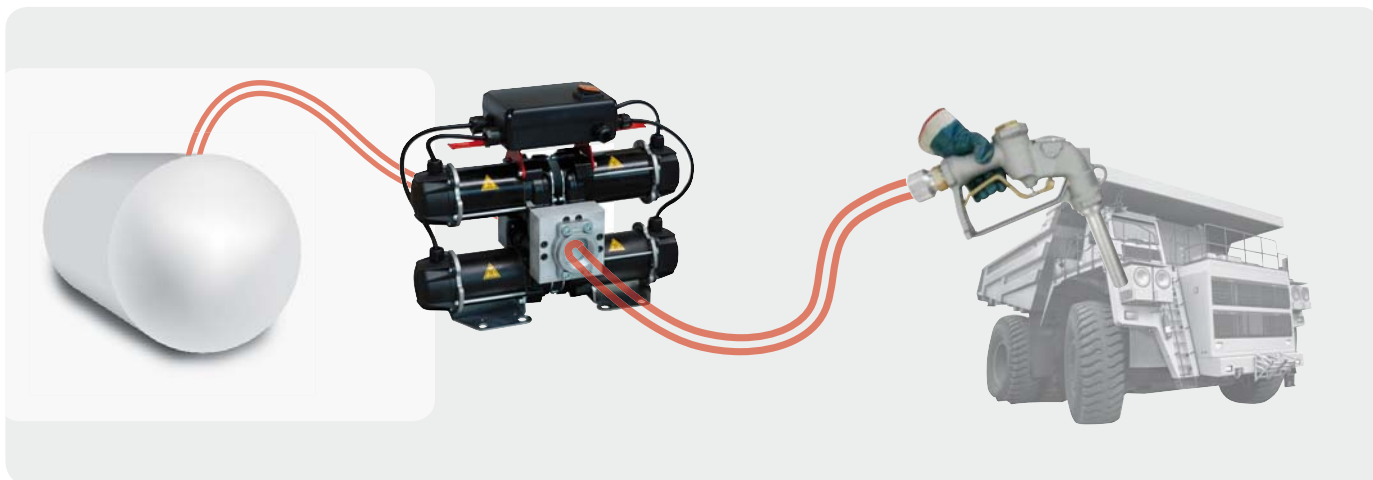

FEATURES

Electric cable



Electric cables with clamps (4 mt)

On/off switch



ON REQUEST

Meter K700 M



Flow rate:
20 - 220 l/min
Accuracy: +/- 1%
Oval gear system
Code: F00540000

Nozzle A280



Flow rate 280 l/min
with swivel
Code: F13249000

Hose Kit 1" 1/2



Code: F18798000
(hose 10 mt + Camlock)
Code: F18799000
(hose 20 mt + Camlock)

PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids type	Flow-rate		Voltage			Duty cycle min.	Pump		Max pressure bar	Inlet BSP
			l/min	gpm	AC V./Hz DC Volt	Power Watt	Amp. max.		mod.	no.		
F00318000	ST 200 DC 24 V	D	155-185	42 - 48	24	1200	50	30	Bypass 3000	4	2	1" 1/2